

PRODUCT DATA SHEET

SikaPower®-730 (ADEKIT A130 / H 9930)

TWO-COMPONENTS EPOXY ADHESIVE MULTIPURPOSE – VERY FAST SETTING

DESCRIPTION

Embedding and anchoring of metal rods on hollow or full supports
Bonding of decorative elements: facing, tiles etc...
Bonding of concrete prefabricated elements (pipes...), reinforcement and repairing of structures

PROPERTIES

- 2 components room temperature curing Epoxy adhesive
- Liquid product suitable for injection
- Fast setting product adapted to reduce assembly time
- Excellent mechanical performances

PHYSICAL PROPERTIES

Composition	RESIN (A)	HARDENER (B)	MIX	METHOD
Mix ratio by weight	100	100		
Mix ratio by volume at 25 °C	100	100		
Colour	Off-white	Pale yellow	Light Amber	
Density at 25 °C	1.15	1.15	-	LT-020
Density of cured product at 23 °C	-	-	1.15	LT-047
Viscosity at 25 °C ^(KP) (Pa.s)	60	30	45	
Pot life on 100 g at 25 °C ^(KP) (min)	-	-	3	LT-002-B
Open time on 7mm bead at 23 °C (min)	-	-	3 – 4	LT-006-B

(KP) Key properties. These values are enclosed in Certificate of Analysis.

MECHANICAL PROPERTIES⁽¹⁾

Hardness ⁽²⁾ ^(KP) (Shore D)	73	LT-022
Tensile strength (MPa)	54	ISO 527
Elongation at break (%)	3.5	ISO 527
YOUNG Modulus (MPa)	3400	ISO 527
Recommended use temperature (°C)	15 to 25	
Working temperature ⁽³⁾ (°C)	- 40 to 120	LT-006-B

(1) Cured 16 hours at 70 °C

(2) Cured 30 minutes at Room Temperature

(3) Working temperature is defined as the temperature at which product keeps 80% of its initial Lap Shear Strength after 1000 hours ageing at this temperature, value on Aluminium, measured at 23 °C.

HANDLING TIME ⁽¹⁾

At 23 °C	(min)	12	LT-006-B
----------	-------	----	----------

(1) Handling time is defined as the time needed to obtain Lap Shear Strength on Aluminium at 23 °C, of 1 MPa.

MECHANICAL PROPERTIES ON ASSEMBLIES ⁽¹⁾

LAP SHEAR STRENGTH AT 23 °C (MPa)			METHOD
Aluminium 2017A (sandblasted)	Initial	17.5 AF	LT-006-B
	After wet cataplast 7 days at 70 °C / 100 % RH	14 AF	
	After 15 cycles D3 ⁽²⁾	14 AF	
Stainless Steel 304 (sandblasted)	Initial	20 AF	
	After wet cataplast 7 days at 70 °C / 100 % RH	17 AF	
Electro-galvanized Steel (sandblasted)		17.5 AF	
Electro-galvanized Steel (acetone wipe)		11.5 AF	
ABS (sanded + Isopropanol)		3.5 SF	
PC (sanded + Isopropanol)		4 SF	
PVC (sanded + Isopropanol)		5 SF	
PMMA (sanded + Isopropanol)		4 SF	
PA6E (sanded + Isopropanol + Plastic Primer) ⁽³⁾		2 AF	
GFR Polyester (Isopropanol wipe)		7 DF	
GFR Epoxy (Isopropanol wipe)		13 AF	

(1) Cured 16 hours at 70°C

(2) Cycle D3 : 16 h at 40 °C/95 % RH + 3 h at -20 °C + 5 h at 70 °C/50 % ± 5 % RH


(3) Plastic sanded, Isopropanol wipe and coated with Plastic Primer 5069 from Sika Advanced Resins.

AF: Adhesive Failure, SF: Substrate Failure, DF: Delamination Failure, according to EN ISO 10365 Standard.

FLOATING ROLLER PEEL STRENGTH AT 23°C

Aluminium 2017A (sandblasted)	(kN/m)	1.5	ISO 4578
----------------------------------	--------	------------	----------

Lap Shear Strenght on Aluminium versus Temperature

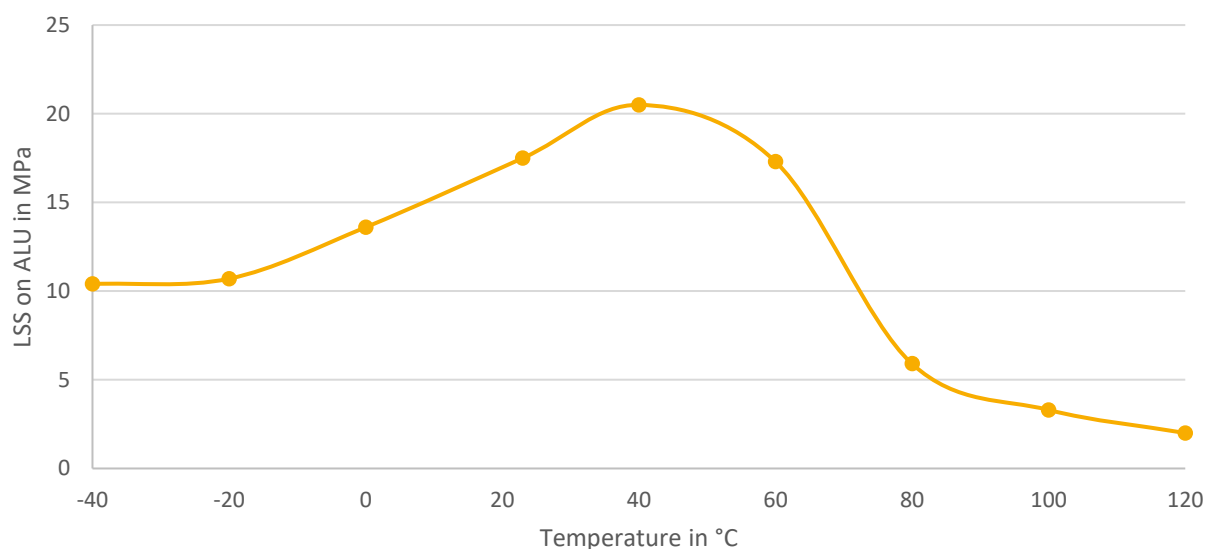

PROCESSING

- **Equipment: SikaPower®-730 (AB)** packaged in 50 ml and 400 ml cartridges require a manual or pneumatic gun.
Please consult our technical department for applications needing a machine.
- **Substrate preparation:** The item to be bonded must be free of all dirt, oil or other foreign matter. A clean, dry surface is a must.
Consult our Technical Support about surface preparations.

HANDLING PRECAUTIONS

Normal health and safety precautions should be observed when handling these products:

- Ensure good ventilation.
- Wear gloves, glasses and protective clothes.

For further information, please consult the Safety Data Sheet.

STORAGE CONDITIONS

Shelf life of **SikaPower®-730 (AB)** (Cartridges) is **12 months** in a dry place and in original unopened containers at a temperature between 15 °C and 25° C.

Shelf life of **SikaPower®-730 (A)** (Resin) is **24 months** in a dry place and in original unopened containers at a temperature between 15 °C and 25° C.

Shelf life of **SikaPower®-730 (B)** (Hardener) packaged in 0.5 kg boxes is **12 months** in a dry place and in original unopened containers at a temperature between 15 °C and 25° C.

Shelf life of **SikaPower®-730 (B)** (Hardener) packaged in 34 kg drums is **9 months** in a dry place and in Original non opened containers at a temperature between 15°C and 25°C.

PACKAGING

■ SikaPower®-730 (AB) / 50ml	Box of 12 cartridges
■ SikaPower®-730 (AB) / 400ml	Box of 12 cartridges
■ SikaPower®-730 (A) (Resin)	0.5 kg, 34 kg.
■ SikaPower®-730 (B) (Hardener)	0.5 kg, 34 kg.
■ Kit SikaPower®-730 (AB) 6(0.5 + 0.5)	Kit 6 x (0.5 kg Resin + 0.5 kg Hardener).

FURTHER INFORMATION

The information herein is offered for general guidance only. Advice on specific applications is available on request from the Technical Department of Sika Advanced Resins. Copies of the following publications are available on request: Safety Data Sheets.

VALUE BASES

All technical data stated in this Product Data Sheet are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

HEALTH AND SAFETY INFORMATION

For information and advice regarding transportation, handling, storage and disposal of chemical products, users shall refer to the actual Safety Data Sheets containing physical, ecological, toxicological and other safety-related data.

LEGAL NOTICE

The information, and, in particular, the recommendations relating to the application and end-use of Sika products, are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with Sika's recommendations. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The user of the product must test the product's suitability for the intended application and purpose. Sika reserves the right to change the properties of its products. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request.

Contact

SIKA DEUTSCHLAND GMBH

Business Unit Industry
Stuttgarter Straße 139
72574 Bad Urach
Phone: +49 7125 940-7692
E-Mail: industry@de.sika.com
Website: www.sika.de

SIKA AUTOMOTIVE FRANCE S.A.S.

ZI des Béthunes - 15, Rue de l'Equerre
95310 Saint-Ouen-l'Aumône
CS 40444
95005 Cergy Pontoise Cedex - FRANCE
Phone: +33 1 34 40 34 60
Fax: +33 1 34 21 97 87
E-Mail: advanced.resins@fr.sika.com
Website: www.sikaadvancedresins.fr

Sika S.A.U.

Carretera de Fuencarral, 72
28108 Alcobendas (Madrid) - SPAIN
Phone: +34 916 572 375
E-Mail: pedidos.sika@es.sika.com
Website: esp.sika.com

Sika Italia S.p.A.

Via Luigi Einaudi 6
20068 Peschiera Borromeo (MI) - Italy
Phone: +39 02 54778111
Fax +39 02 54778 119
E-Mail: info@sika.it
Website: www.sika.it

Sika Limited

Head Office, Watchmead – Welwyn
Garden City – AL7 1BQ – United Kingdom
Phone: +44 1707 394444
E-Mail: industry-sales@uk.sika.com
Website: www.gbr.sika.com

SIKA AUTOMOTIVE SLOVAKIA S.R.O.

Tovarenska 49
953 01 Zlate Moravce - SLOVAKIA
Phone: +421 2 5727 29 33
Fax: +421 37 3000 087
E-Mail: SikaAdvancedResins@sk.sika.com
Website: www.sikaadvancedresins.com

Sika Industry – Tooling, Resins and Marine

30800 Stephenson Highway
Madison Heights, Michigan 48071 - USA
Phone: +1 248 588 2270
Fax: +1 248 616 7452
E-Mail: advanced.resins@us.sika.com
Website: www.sikaindustry.com

SIKA AUTOMOTIVE EATON RAPIDS, INC.

1611 Hults Drive
Eaton Rapids, Michigan 48827 - USA
Phone: +1 517 663 81 91
Fax: +1 517 663 05 23
E-Mail: advanced.resins@us.sika.com
Website: www.sikaadvancedresins.us

SIKA MEXICANA SA de CV

Av. Gustavo Baz #309 Centrum Park
54060 Tlanepantla Estado de MEXICO
Phone: +52 442 238 5800
E-Mail: roman.octavio@mx.sika.com

SIKA AUTOMOTIVE SHANGHAI CO. LTD.

N°53 Tai Gu Road
Wai Gao Qiao
Free Trade Zone, Pudong
200131 Shanghai - CHINA
Phone: +86 21 58 68 30 37
Fax: +86 21 58 68 26 01
E-Mail: industry@cn.sika.com
Website: www.sika.cn

Sika Japan Ltd.

Akasaka-K-Tower 7F, 1-2-7, Moto-Akasaka, Minato-ku,
Tokyo · Tokyo · Tokyo · 107-0051 · Japan
Phone: +81 3-6433-2101
Fax: +81 3 6433 2102
E-Mail: advanced-resins@jp.sika.com
Website: www.jpn.sika.com

SIKA INDIA PVT LTD,

Plot No. Pap-V-90/1,
Chakan Industrial Area,
Phase-II, Vasuli, Khed, PUNE,
Maharashtra – 410501
E-Mail: info.india@in.sika.com