




# K6337

## 300°C Flash Tape

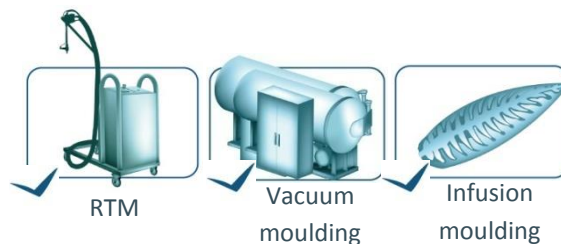

### DESCRIPTION

K6337 is manufactured from polyimide film, coated with high performance acrylic adhesive. This tape can be used for high temperature applications: vacuum molding or vacuum infusion, in oven or autoclave.

K6337 has good chemical resistance, even at high temperatures, up to 300°C. Easy removal after cure.

K6337 pressure sensitive tapes are multi-functional: holding down vacuum bagging materials & thermocouple wires, masking-off or as protection.

### STORAGE

Keep this tape at room temperature and normal hygrometry.

### CHARACTERISTICS

Backing material	Colour	Width	Length	Adhesive type	Max temp.
Polyimide	Orange	13, 25 ,50 & 100 mm	33 m	Acrylic	300°C

Backing thickness	Total thickness	Adhesive thickness	Tensile strength	Elongation
25 $\mu$	63 $\mu$	38 $\mu$	40 N/cm <sup>2</sup>	70 %