


SM5127

Sealant tape up to 205°C

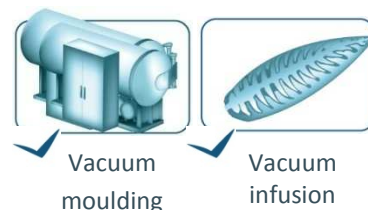

DESCRIPTION

LSM5127 is polyvalent and economic sealant tape recommended high temperature cures up to 205°C (autoclaves cycles).

LSM5127 is ideal for use on composite or metallic tools; this sealant tape is easy to release from the tools: no contamination on the surface mould. (It is recommended to strip the tape from the mould surface once it has cooled down to room temperature).



SM5127

STORAGE

Keep this film at room temperature and normal hygrometry. Do not refrigerate.

Shelf life: use within the 12 months after deliveries.

CHARACTERISTICS

| Product | Max. Serv. Temp. | Dimensions | Rolls/box | Color | Use |
|---------|------------------|--|-----------|-------|------------------|
| SM5127 | 205°C 401 F | 3,2 mm x 12,7 mm x 7,62 m 1/8 inch. x 1/2 inch. x 25 ft | 40 | Black | High temperature |