


PA60VS

Coated Polyamide Peel Ply

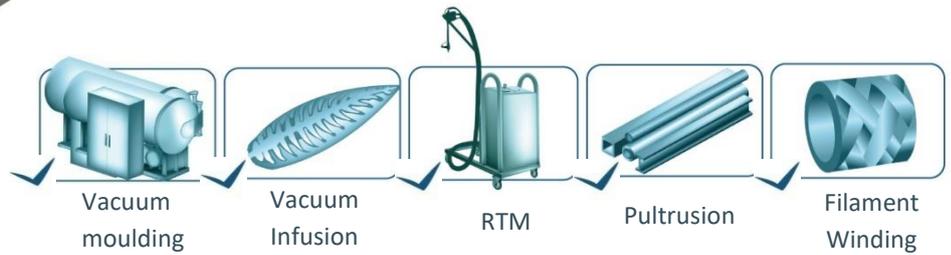

DESCRIPTION

PA60VS is a technical light green peel ply, dyed & coated with silicone, designed to be used on epoxy and polyester composite systems. The **PA60VS** allows a very easy removal. This fabric leaves a fine surface impression for **painting** and **secondary bonding**. Coated silicone fabrics can potentially contaminate the laminate. It is available in full width or bands. During the vacuum molding process, its porosity allows a good flow of the excess resin towards the bleeder fabric.

Not to be used with phenolic resins.

STORAGE

Keep this film at room temperature and normal hygrometry.

CHARACTERISTICS

Fiber Type	Color	Thick.	Weight	Use with Phenolic	Treatment	Max. Serv. Temp.	Packaging
Polyamide	Light Green 	120 µm	65 g/m ²	NO	Scoured & Heat Set + coated silicone	200 °C	Roll

Weave	Release treatment	Length	Standard Width	Tape	Elongation at break		Breaking Strength	
					Warp	Weft	Warp	Weft
Taffeta	Silicone	100 m / 500 m	1510mm	13 to 1510 mm	39	51	62 daN/5cm	57 daN/5cm

Manufacturer: DIATEX (Made in France)

Indice A - 15/09/2023

